




Technical Details

Body Material	Stainless steel 1.4301 (304)
Cable sheath Material	PVC
Seals material	FKM
Diaphragm material	Stainless Steel 1.4435 (316L)
Cable length	3m, 6m, 9m or 12m; others available on request
Weight	120 g (Without cable) Cable: 25 g / m
Ingress protection	IP68
Accuracy	PN > 160 mbar: $\leq \pm 0.5\%$ FSO PN ≤ 160 mbar: $\leq \pm 1\%$ FSO
Output	4 ... 20 mA / 2-wire 0 ... 10 V / 3-wire
Mechanical connection	G1/4" DIN 3852
Dimensions (mm)	Height: 66.5 Diameter: 24
CE-Conformity	EMC Directive: 2014/30/EU

Technical Drawing

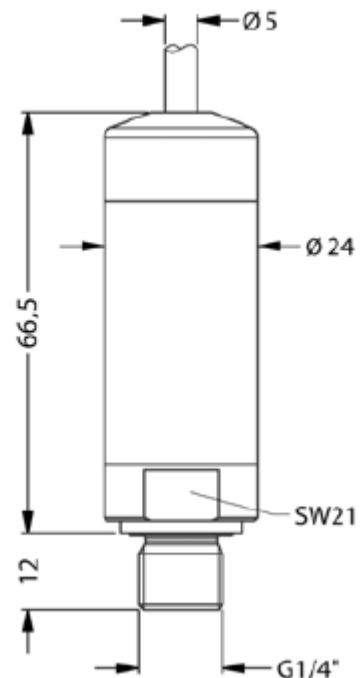

G1/4" DIN 3852

Drawing not to scale



**Proud UK
Manufacturer**

Product Description

The Stormsaver Active Attenuation level sensor is a piezoresistive stainless steel pressure transmitter. It is a vital component in the Stormsaver Active Attenuation System.

Within the system, it is used to precisely measure the water level within an attenuation tank. This data is then fed to the Active Attenuation Control Panel (See separate data sheet).